EXPLO SFX

IGNITION SYSTEMS • SPECIAL EFFECTS

GX2 Raincover

October 2023

Explo SFX GmbH • Völkermarkter Straße 240 • 9020 Klagenfurt a.W.
www.explo.at • office@explo.at • +43 463 32 245

1 PARTSLIST

- Lid
- Protective plate for the Rx2-1K Gas
- Left side plate
- Right side plate
- Back plate
- Front plate
- Front connecting plate
- Back connecting plate
- Gas tube extension
- TX 15 C3,9x9,5 self-tapping screw (7)
- TX 25 M5x12 screws (20)

2 TOOLS NEEDED FOR THE ASSEMBLY

We suggest you use a power drill with the following bits:

- Torx 15 for the self-tapping screws on the bottom and the protective plate
- Torx 20 for the M4 screws (in case you already have a RX2-1K Gas)
- Torx 25 for the M5 screws
- 19 mm wrench

If you are not using a power drill, then please use the according Torx-keys.

Screws are only to be fastened hand tight.

To use the rain-cover in combination with the bottom plate with tripod-holder, first remove the bottom plate and reinstall it when the assembly of the rain cover is finished!

3 ASSEMBLY OF THE PROTECTIVE PLATE FOR THE RX2-1K GAS

If you intend to use the RX2-1K Gas, we require you use the protective plate. This plate should also be installed if the RX2-1K Gas is not used to provide extra protection for the GX2 inside the rain cover.

Remove The RX2-1K Gas and reinstall it with the protective plate under the holder of the afore mentioned. We recommend using a magnetic antenna for the RX2-1K Gas as the rain cover may interfere with the signal if used with the standard antenna.

4

4 ASSEMBLY OF THE CONNECTING PLATES

Use the provided self-tapping screws to connect the two bottom plates as shown in the pictures.

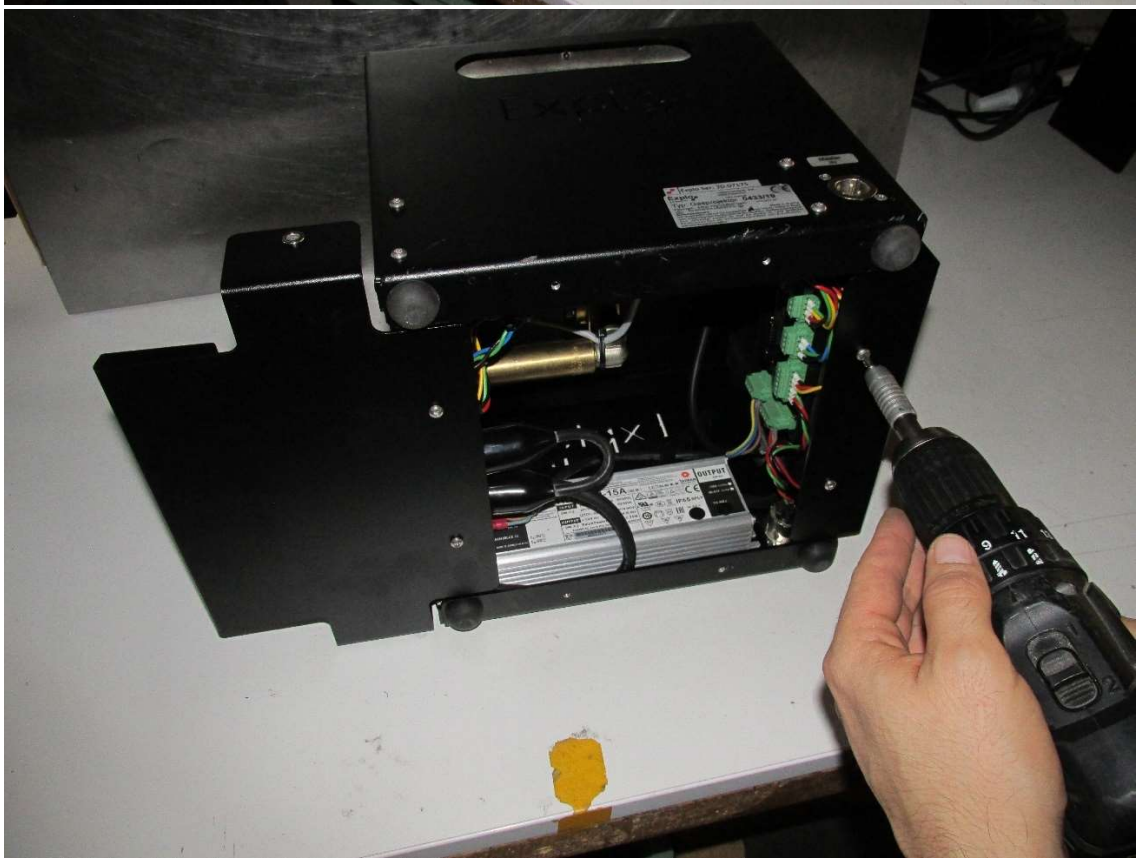

5 ASSEMBLY OF THE OUTER SHELL

Use the provided M5 screws to connect the plates in the order that is shown below.

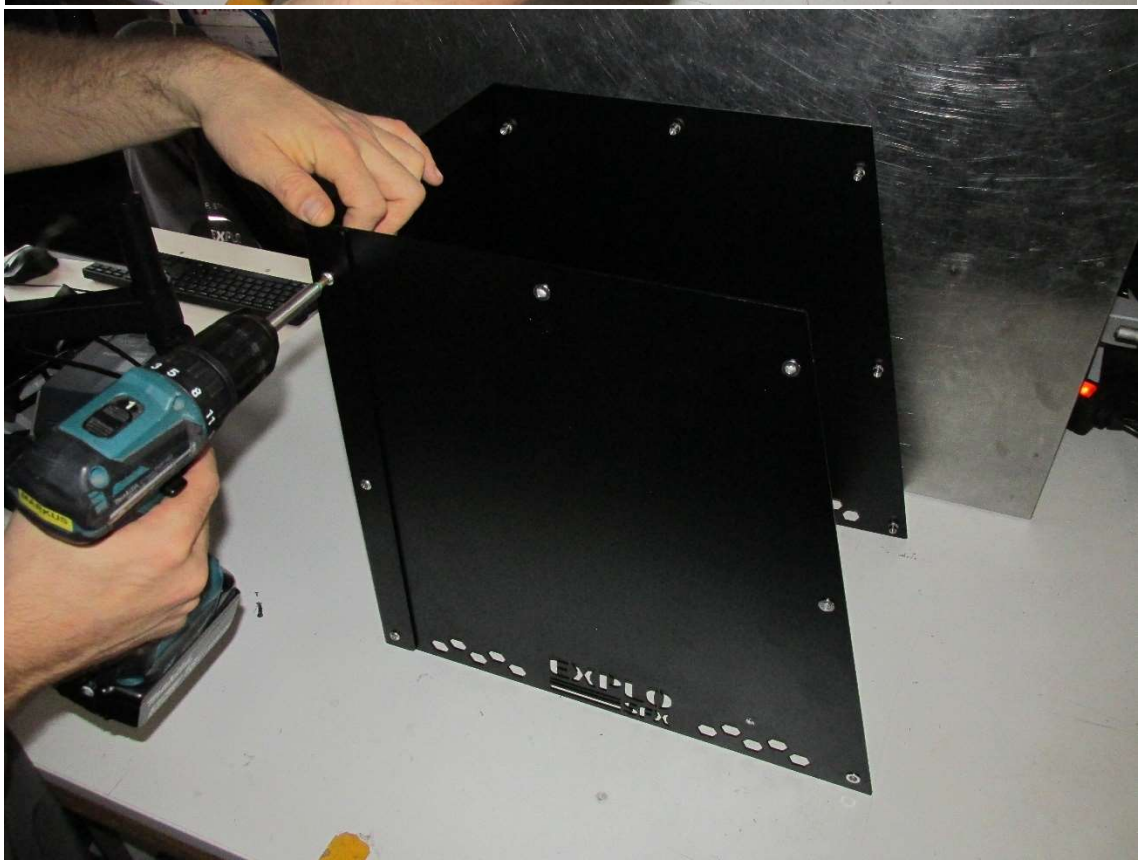

1 3 5 8

6 CONNECTING THE EXTENSION

Screw the extension on by hand until you can turn it no further. Then use the 19mm wrench to tighten it all the way. 1/4 turn is enough with the wrench.

Connect your input cables at this point because afterwards you will not be able to do it anymore!

Also check if the correct nozzle is installed for the type of gas you are going to use!

7 ASSEMBLY OF THE SHELL AND THE GX2

Lift the shell over the GX2 with the installed connecting plates and tighten the screws to assemble the shell to the GX2.

10

8 FINISHING THE ASSEMBLY

Put the lid on top and fasten the last 2 screws.

9 FINISHING THE ASSEMBLY

Connect the aerosol-adapter to finish the assembly.

If you are not using an AEROSOL-ADAPTER, instead connect the LPG hose coming from the gas tank at this point!